




Amerex Corporation



Fire Extinguishers

MADE IN USA!

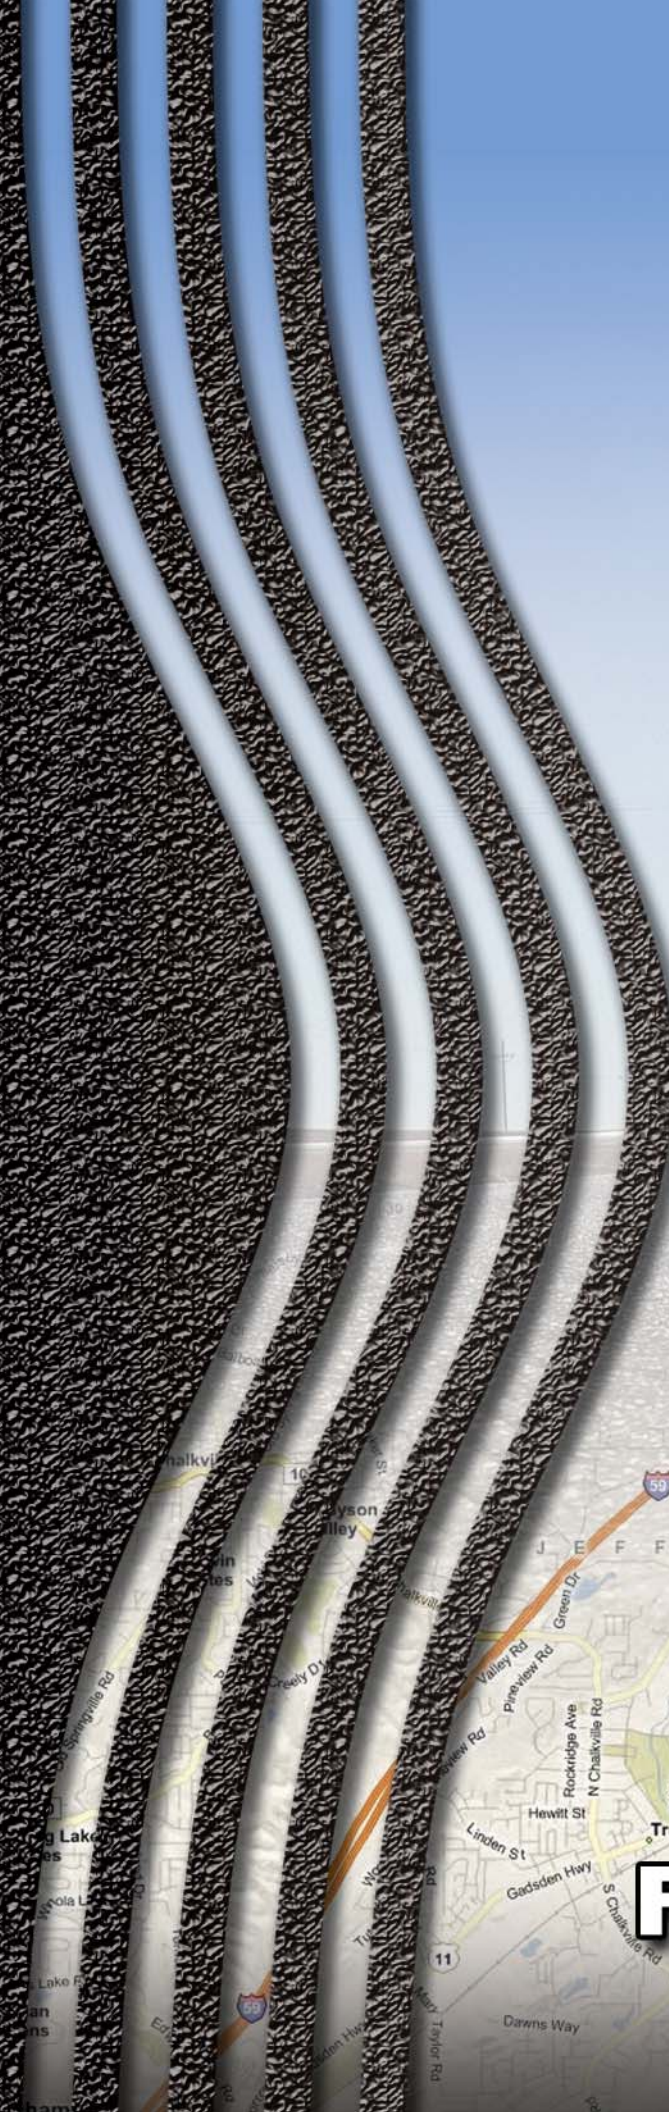

Portable Fire Extinguishers

Features:

Easy to use

Rugged steel cylinders

Durable all metal valves

Easy to read instructions

Bar Coded Nameplates

U/L & Meets or exceeds D.O.T. requirements

6 YEAR WARRANTY - DRY CHEMICAL MODELS / 5 YEAR WARRANTY - WATER MODEL

Extinguishing Agents:

ABC (paper, wood, oil & electrical)

Regular (grease, oil & electrical)

Water (paper, wood)





ABC MODELS		B417T		B402T/B500T	B443	B456	A411	240
BC MODELS	A620T	B403T	B409T	B453T		B457	A412	

Type	Size (Capacity)	Model No.	Available Chrome	Nozzle/Hose	U/L Rating	Shipping Wt. - Lbs.	Height (In.)	Width (In.)	Depth (Diam. - In.)	Range (Ft.)	Discharge Time - Sec.	Standard Bracket
WATER	2½ GAL.	240	N/A	Hose and Nozzle	2A	7½	24½	9	7	45-55	55	Wall
ABC	2½ LB.	B417T B417TC	Yes	Nozzle Only	1A:10B:C	5½	15½	5¾	3	9 - 15	10	Vehicle/Marine
	5 LB.	B500T B500TC	Yes	Hose and Horn	2A:10B:C	9¾	15¼	7¼	4¼	12 - 18	14	Vehicle/Marine
	5 LB.	B402T B402TC	Yes		3A:40B:C	9½	15¼	7¼	4¼	12 - 18	14	Vehicle/Marine
	6 LB.	B443			3A:40B:C	12¾	16	7¾	5	15 - 21	14½	Wall
	10 LB.	B456			4A:80B:C	18	20	7¾	5	15 - 21	20	Wall
	20 LB.	A411			20A:120B:C	38	23¾	10¼	7	15 - 21	28	Wall
REGULAR	1 LB.	A620T A620TC	Yes	Nozzle Only	2B:C	2½	10	3½	2¾	5 - 8	10	Vehicle
	2½ LB.	B403T B403TC	Yes		10B:C	5½	15½	5¾	3	9 - 15	10	Vehicle/Marine
	5 LB.	B409T B409TC	Yes		10B:C	9¾	15¼	5½	4¼	12 - 18	10	Vehicle/Marine
	5½ LB.	B453 B453C	Yes	Hose and Horn	40B:C	9½	15¼	7¼	4¼	12 - 18	14	Wall
	10 LB. (Tall)	B457			60B:C	18	20	7¾	5	15 - 21	18	Wall
	20 LB.	A412			120B:C	38	23¾	10¼	7	15 - 21	28	Wall

Vehicle Mounting Brackets

All Amerex brackets are quality manufactured of steel with a primed and polyester powder paint finish. This paint finish assures many years of use and meets the latest U/L salt spray requirements (240 hrs. @ 20% salt solution - ASTMB 117).

Extinguisher Type	Size (Capacity)	Model	Cyl. Diam.	Standard Bracket Model or Part Number and Type Bracket	U.S.C.G. Approved with Model	Heavy Duty Vehicle with Metal Strap(s)	Heavy Duty Vehicle (Box Type)	Heavy Duty Vehicle with Rubber Straps
WATER	2 ½ Gal.	240	7"	1007 Wall	N/A	810	864	Yes
ABC DRY CHEMICAL	2 ½ Lb.	B417T B417TC	3"	817 817B Vehicle/Marine	817 817B	817S		860
	5 Lb.	B402T B402TC	4 ¼"	818 818B Vehicle/Marine	818 or 821	818S, 821, 821S, 861H	807	860
	5 Lb.	B500T B500TC	4 ¼"	818 818B Vehicle/Marine	818 or 821	818S, 821, 821S, 861H	807	860
	6 Lb.	B443	5"	5525 Wall	808 or 809	808	809	862
	10 Lb.	B456	5"	0546 Wall	809	846	809	862
	20 Lb.	A411	7"	0577 Wall	810		810	864
REGULAR DRY CHEMICAL	1 Lb.	A620T A620TC	2 ¾"	845 845B Vehicle	Not Available			
	2 ½ Lb.	B403T B404TC	3"	817 817B Vehicle/Marine	817	817S		860
	5 Lb.	B409T B409TC	4 ¼"	818 818B Vehicle/Marine	818 or 821	818S, 821, 821S, 861H	807	860
	5 ½ Lb.	B453 B453C	4 ¼"	1521 Wall	818 or 821	818S, 821, 821S, 861H	807	860
	10 Lb.	B457	5"	0546 Wall	809	846	809	862
	20 Lb.	A412	7"	0577 Wall	810		810	864

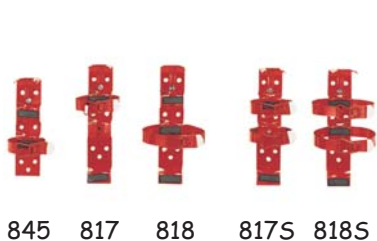



Amerex Corporation

P.O. Box 81
Trussville, AL 35173-0081
Ph: (205) 655-3271 ❖ Fax: (800) 654-5980
www.amerex-fire.com
sales@amerex-fire.com

A fire extinguisher equipped with a hose has clear cut advantages over one having only a fixed nozzle. The mechanism of any stored pressure fire extinguisher requires that it be operated as close as possible to the vertical (upright) position to obtain maximum effectiveness. Fires in hard to reach areas such as under dashboards, wheel wells and engine compartments will be more efficiently engaged utilizing the reach and flexibility of a hose equipped extinguisher. Why take chances with the safety of you and your vehicle.



Presented by: